

SHDVR-08

8 CH H.264 DVR



View from ANYWHERE







- Mobile playback and viewing on most major Smartphone platforms
- VGA and composite video (BNC) output for local viewing and playback
- · Convenient and simple networking setup for locations with static or dynamic IP addresses
- Browser and desktop playback and live viewing, with compatibility in mind. View from any internet capable PC, Mac or Linux computer and all major browsers on your local network or anywhere in the world


Record MORE

- Motion recording, scheduled recording, alarm trigger event recording allow for more efficient recording with less searching
- · Adjustable video quality and frame rates to conserve drive space
- Motion masking helps eliminate wasted drive space
- · Save video to USB hard drives, thumb drives and optical drives
- · Virtually unlimited recording time with automatic network backup

Be SECURE

- · High quality, reliable video processor means your video will be there when you need it
- Record, view, playback, back-up and access video over the network simultaneously all without degrading the video
- · Up to 4 Channels of audio recording
- Interface the DVR with a new or existing alarm system to record when triggered or alert your alarm system of trouble

Rear Panel

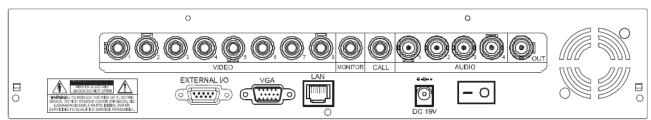

Package Contents:

- One (1) DVR
- One (1) Remote Control (batteries included)
- One (1) Remote Control User Manual
- One (1) Power Adapter & Power Cord, 19V DC @ 2.1A
- Four (4) Screws for HDD
- · One (1) Quick Setup Guide
- One (1) User Manual & Software CD

SPECIFICATIONS

Note NTSC				
Video Compression Format H.284 Video Output (RNO) Main Monitor 8 channols, Composite video signal 1 Vp-p.750 BNC Video Cutput (VGA) Main Monitor For satile display Video Cutput (VGA) Built in VGA interface for LCD monitor Audio Input / Output 4 audio Input, 5 audio output (VGA) Max. Recording Rate Frame 704×400 pixele with 120 IPS 704×576 pixele with 100 IPS Image Quality Setting BESS 7 HGCH / NORMAL 8 Sex 240 pixele with 120 IPS 32×2289 pixele with 100 IPS Image Quality Setting BESS 7 HGCH / NORMAL 8 Sex 240 pixele with 120 IPS 32×2289 pixele with 100 IPS Image Quality Setting BESS 7 HGCH / NORMAL 8 Sex 240 pixele with 120 IPS 32×2289 pixele with 100 IPS Image Quality Setting BESS 7 HGCH / NORMAL / Audion / Remote 8 Sex 240 pixele with 120 IPS 32×2289 pixele with 100 IPS Image Quality Setting BESS 7 HGCH / NORMAL / Audion / Remote 8 Sex 240 pixele with 120 IPS 32×2289 pixele with 100 IPS Image Quality Setting Maxim Mark / Molico / Alam / Remote 9 FS 9 FS Molicon Detection Area 1 10 × 12 gixth pixel / Alam / Remote 9 FS 9 FS <tr< th=""><th colspan="2">Model</th><th colspan="2">SHDVR-08</th></tr<>	Model		SHDVR-08	
Video Input 8 channels, Composite video signs i1 Vp.p 750 BNC Video Output (RNC) Main Monitor For stable desplay Video Output (VGA) Builtie video interface for LCD monitor Audio Input / Output 4 audio input (VGA) 704-9576 placits with 100 IPS Max. Recording Rate Frame 704-480 pixels with 120 IPS 302-280 pixels with 100 IPS Image Quality Setting BEST / HiGH / NORMAL Image Quality Setting Accommodates 18A1 HDO (apparty up to 2TE) Hard Obles Storage Accommodates 18A1 HDO (apparty up to 2TE) 302-280 pixels with 100 IPS Recording Mode Maria IT immer / Motion / Alarm Famoto PEST / HiGH / NORMAL USB Mouse Control First Problem / Famoto PEST / HiGH / NORMAL / LOW VER Description Recording Mode PEST / HIGH / NORMAL / LOW PEST / HIGH / NORMAL / LOW USB Mouse Control YES Pest / Pest / Micro / Pest				
Victor Output (BNC) Main Monitor For sabable display Victor Output (VGA) Builth 10x Vanterines for LCD monitor Audio Input / Output 4 audio input / Output (Monitor) Max. Recording Rate (PF) 70x4-480 pixels with 120 IPS (PF) 352x288 pixels with 100 IPS (PF) Max. Recording Rate (PF) \$22x240 pixels with 120 IPS (PF) 352x288 pixels with 100 IPS (PF) Hard Disk Stores Accommodulate 15x1 HDD (capacity up to 2TB) PE Quick Search Time / Motion / Natural search mode Recording Mode Accommodulate 15x1 HDD (capacity up to 2TB) PE Motion Detection Area Motion Potection Area 11x1 YEB MOUSE (PF) PE Motion Detection Area PE PE PE Motion Precion Area PE PE PE Motion Precion Area PE PE PE Backup Device<	Video Compression Format			
Video Output (VGA) For sequence display Video Output (VGA) Builtin VGA interface for LCD monitor Max. Recording Rate Frame 7044480 pixels with 120 IPS 7045476 pixels with 100 IPS Image Quality Setting Frame 7044480 pixels with 120 IPS 7045476 pixels with 100 IPS Image Quality Setting Frame 7044480 pixels with 120 IPS 7045476 pixels with 100 IPS Image Quality Setting Accommodates 1 SATA HDD (capacity up to 2TB) Unlike Storage Accommodates 1 SATA HDD (capacity up to 2TB) Unlike Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Usla Storage Accommodates 1 SATA HDD (capacity up to 2TB) Web Transmitting Compression H 1264 Acco	Video Input		8 channels, Composite video signal 1 Vp-p 75Ω BNC	
Number N	Video Output (BNC) Main Monitor		For stable display	
Audio Injust / Output Frame 704-4800 pixels with 120 IPS 704-476 pixels with 100 IPS Max. Recording Rate Recording Rate Rate Rate Plant		Call Monitor	For sequence display	
Max. Recording Rate (DF mail Pail Pail Pail Pail Pail Pail Pail P	Video Output (VGA)			
Marage Quality Setting	Audio Input / Output			
Margo Quality Setting	Max. Recording Rate		· ·	704×576 pixels with 100 IPS
National Disk Storage		CIF	352×240 pixels with 120 IPS	352×288 pixels with 100 IPS
Quick Search Time / Motion / Alarm search mode Recording Mode Manual / Timer / Motion / Alarm / Remote USB Mouse Control YES Motion Detection Area 16 * 12 grids per channel Motion Detection Sensitivity HIGH / NORMAL / LOW Pre-alarm Recording YES Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format 1 264 Ethernet 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance (Including iPad, iPhone, BlackBerny, Windows Mobile, Symbian & Android) Remote Surveillance CKMS: Our self-developed and free software, Video Viewer' Operating System: Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Wholms Y / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Network Protocol TCPIP, PPPOE, DHCP and DDNS Remote Independent Operation YES Remote Event Download & Playback YES Remote Event Download & Playback YES Remote Live Audio YES Remote Control YES Remote Control YES	Image Quality Setting			
Recording Mode Manual / Timer / Motion / Alarm / Remote USB Mouse Control YES Motion Detection Area 16 × 12 grids per channel Motion Detection Sensitivity HIGH / NORMAL / LOW Pre-slarm Recording YES Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format H. 264 Ethernet 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance (Including iPad, iPhone, Black Berry, Windows Mobile, Symbian & Android) Remote Striveillance CMS: Our self-developed and fire software. "Video Viewer" Operating System: Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Media Player: QuickTime Max. on-line user: 10 Network Protocol TCPPP, PPPOE, Di-CP and DDNS Remote Live Audio YES Remote Event Download & Playback YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES Vieture Lavel	Hard Disk Storage			
USB Mouse Control YES Motion Detection Area 16 × 12 grids per channel Motion Detection Sensitivity HIGH / NORMAL / LOW Pre-alarm Recording YES Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format H.264 Ethered 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance YES Remote Surveillance CIMIS: Our self-developed and five software, Video Viewer' Opperating System: Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Metwork Protocol TCP/IP, PPPOE, DHCP and DDNS Remote Event Download & Playback YES Remote Event Download & Playback YES Remote Live Audio YES Event Notification By FTP & E-Mail Remote Cutrol YES (Receiver bull-In) Picture Zoom 2X digital zoom PTZ Control YES Key Lock (Password Protection) YES User Lowi Administrator & Operator	Quick Search			
Motion Detection Area 16 × 12 grids per channel Motion Detection Sensitivity HIGH / NORMAL / LOW Pre-alarm Recordity YES Backup Device USB 2.0 flash drive! Network Web Transmitting Compression Format 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance YES Remote Surveillance YES (Including IPad, IPhone, BlackBerry, Windows Mobile, Symbian & Android) Remote Surveillance CMS: Our self-developed and free software, Video Viewer* (Operating Systems) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Visia / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Network Protocol TCP/IP, PPPOE, DHCP and DDNS Remote Independent Operation YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (Reverse bull-in) Picture Zoom 2X digital zoom PTZ Control YES User Level Administrator & Operator Video	Recording Mode			
Motion Detection Sensitivity HIGH / NORMAL / LOW Pre-alarm Recording YES Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format 1 10/100 Base T. Supports remote control and live view via Ethernet Mobile Surveillance (Including IPad, IPhone, BlackBerry, Windows Mobile, Symbian & Android) YES Mobile Surveillance (Operating System: Windows 7 / Visital XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Web Browser: Independent Explorer, Mozilla Firefox, Google Chrome & Mac Safari Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Network Protocol TCP/IP, PPOE, DHCP and DDNS Remote Live Audio YES Event Deveload & Playback YES Remote Live Audio YES Event Audification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom YES Alarm VO 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable				
Pre-alarm Recording YES Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format I L264 Format I 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance (Including IPad, IPhone, BlackBerry, Windows Mobile, Symbian & Android) Remote Surveillance CMS: Our self-developed and free software, Video Viewer' Operating System: Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Metwork Protocol TCP/IP, PPDE, DHCP and DDNS Remote Independent Operation YES Remote Live Audio YES Event Notification By FTP 8 E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoon YES Alarm I/O YES Alarm I/O YES Camera Title Supports up to 12 letters Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Engintness Date Display Format	Motion Detection Area			
Backup Device USB 2.0 flash drive / Network Web Transmitting Compression Format H 264 Ethernet 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance YES Comparating System: CMS: Our self-developed and free software, "Video Viewer" Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Mindows 7 / Vista / XP Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Media Player: QuickTime Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Media Player: QuickTime Media Player: QuickTime Media Player: QuickTime Media Player: QuickTime Media Player: QuickTime Media Player: QuickTime Remote Live Julia YES Remote Cuntor YES Event Notification PYES (Presented Player) Mey Lock (Password Protection)	Motion Detection Sensitivity		HIGH / NORMAL / LOW	
Web Transmitting Compression Format H.264 Format 10/100 Base-T. Supports remote control and live view via Ethernet Mobile Surveillance (Including iPad, iPhone, BlackBerry, Windows Mobile, Symbian & Android) Remote Surveillance (Operating System: Windows 7 / Vista / XP) CMS: Our self-developed and free software, "Video Viewer" Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Network Protocol TCPIP, PPDED pHCP and DDNS Remote Independent Operation YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES User Level Administrator & Operator Video Kpassword Protection YES User Level Administrator & Operator Video Adjustable Hu / Saturation / Contrast / Brightness Date Display Format YEM (Contrast / Brightness) Date Display Format YEM (Contrast / Brightness) Power Source (±10%) 42 W Operating Temperature	Pre-alarm Recording		YES	
Format Internet 10/100 Base-T. Supports remote control and live view via Ethermet Mobile Surveillance YES Remote Surveillance (Operating System: Windows Mobile, Symbian & Android) CMS: Our self-developed and free software, "video Viewer" (Operating System: Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Media Player: QuickTime Remote Live Audio YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom YES Malar Wo YES User Level Administrator & Operator Video Loss Detection YES	Backup Device		USB 2.0 flash drive / Network	
Mobile Surveillance YES (Including iPad, iPhone, BlackBerry, Windows Mobile, Symbian & Android) Remote Surveillance (Operating System: Windows 7 / Vista / XP) CMS: Our self-developed and free software, "Video Viewer" (Operating System: Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Media Player: QuickTime Media Player: QuickTime Max. on-line user: 10 Media Player: QuickTime Memote Protocol TCP/IP, PPPOE, DHCP and DDNS Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Ajustable Hu / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Consumption (±10%) 42 W Operating Temperature 50°F - 104°F / 10°C ~ 40°C			H.264	
Remote Surveillance (Operating System: Windows 7 / Vista / XP)	Ethernet		10/100 Base-T. Supports remote control and live view via Ethernet	
Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari Windows 7 / Vista / XP) Media Player: QuickTime Network Protocol TCP/IP, PPPOE, DHCP and DDNS Remote Independent Operation YES Remote Event Download & Playback YES Remote Live Audio PES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom YES Alarn I/O YES Alarn I/O YES Vest Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Video Adjustable YES Video Adjustable Hue / Saturation / Contrast / Brightness Date Isplay Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Consumption (±10%) 30°F ~ 104°F / 10°C ~ 40°C Power Consumption (±10%) 30°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.3(H) x 8.7(B) inches / 343(W) x 59(H) x 223(D) mm System Recovery	Mobile Surveillance			
Windows 7 / Vista / XP) Web Browser: Internet Explorer, Mozilla Firetox, Google Chrome & Mac Safari Network Protocol Max. on-line user: 10 Remote Independent Operation YES Remote Event Download & Playback YES Remote Live Audio By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Consumption (±10%) 3 System auto recovery after power failure Operating Temperature 50°F ~ 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery	(Operating System:		CMS: Our self-developed and free software, "Video Viewer"	
Network Protocol Max. on-line user: 10 Remote Independent Operation YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom YES (IR receiver built-in) PTZ Control YES Alarm I/O 4 inputs, 1 output Vey Lock (Password Protection) YES Video Loss Detection YES Video Adjustable YES Video Adjustable YES Video Adjustable YES Video Applies Saving YES Power Source £10%) YES Power Consumption £10%) YES Power Co			Web Browser: Internet Explorer, Mozilla Firefox, Google Chrome & Mac Safari	
Network Protocol TCP/IP, PPPOE, DHCP and DDNS Remote Independent Operation YES Remote Event Download & Playback YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YYMMOD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19Y DC Power Consumption (±10%) 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure			Media Player: QuickTime	
Remote Independent Operation YES Remote Event Download & Playback YES Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hu / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure			Max. on-line user: 10	
Remote Event Download & Playback Remote Live Audio Event Notification By FTP & E-Mail IR Remote Control Ptc (IR receiver built-in) Picture Zoom PTZ Control Alarm I/O At inputs, 1 output Key Lock (Password Protection) User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format PYES Power Source (±10%) Power Consumption (±10%) Operating Temperature System Recovery System Recovery System auto recovery after power failure	Network Protocol		TCP/IP, PPPOE, DHCP and DDNS	
Remote Live Audio YES Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Remote Independent Operation		YES	
Event Notification By FTP & E-Mail IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Remote Event Download & Playback		YES	
IR Remote Control YES (IR receiver built-in) Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery	Remote Live Audio		YES	
Picture Zoom 2X digital zoom PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W	Event Notification		By FTP & E-Mail	
PTZ Control YES Alarm I/O 4 inputs, 1 output Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	IR Remote Control		YES (IR receiver built-in)	
Alarm I/O Key Lock (Password Protection) User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) Power Consumption (±10%) Operating Temperature System Recovery System auto recovery after power failure	Picture Zoom		2X digital zoom	
Key Lock (Password Protection) YES User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	PTZ Control		YES	
User Level Administrator & Operator Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W	Alarm I/O		4 inputs, 1 output	
Video Loss Detection YES Camera Title Supports up to 12 letters Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Key Lock (Password Protection)		YES	
Camera TitleSupports up to 12 lettersVideo AdjustableHue / Saturation / Contrast / BrightnessDate Display FormatYY/MM/DD, DD/MM/YY & MM/DD/YYDaylight SavingYESPower Source (±10%)19V DCPower Consumption (±10%)< 42 WOperating Temperature50°F ~ 104°F / 10°C ~ 40°CDimensions**13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mmSystem RecoverySystem auto recovery after power failure	User Level		Administrator & Operator	
Video Adjustable Hue / Saturation / Contrast / Brightness Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Video Loss Detection		YES	
Date Display Format YY/MM/DD, DD/MM/YY & MM/DD/YY Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Camera Title		Supports up to 12 letters	
Daylight Saving YES Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W Operating Temperature 50°F ~ 104°F / 10°C ~ 40°C Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Video Adjustable		Hue / Saturation / Contrast / Brightness	
Power Source (±10%) 19V DC Power Consumption (±10%) < 42 W	Date Display Format		YY/MM/DD, DD/MM/YY & MM/DD/YY	
Power Consumption (±10%) < 42 W	Daylight Saving		YES	
Operating Temperature $50^{\circ}F \sim 104^{\circ}F$ / $10^{\circ}C \sim 40^{\circ}C$ Dimensions** $13.5(W) \times 2.32(H) \times 8.78(D)$ inches / $343(W) \times 59(H) \times 223(D)$ mmSystem RecoverySystem auto recovery after power failure	` ′		19V DC	
Dimensions** 13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm System Recovery System auto recovery after power failure	Power Consumption (±10%)		< 42	W
System Recovery System auto recovery after power failure	Operating Temperature			
	Dimensions**		13.5(W) x 2.32(H) x 8.78(D) inches / 343(W) x 59(H) x 223(D) mm	
Optional Peripherals Keyboard Controller	System Recovery			
	Optional Peripherals		Keyboard Controller	

