



T8WB24-V036



FEATURES

- **HD TVI - 1920 x 1080 @ 30fps**
- 1/3" Progressive Scan CMOS
- 3.6mm Fixed Lens
- 0.01 Lux @ F1.2 (AGC ON), 0 Lux with IR
- 24 IR LED
- IR distance up to 65ft / 20m
- Mechanical IR Cut Filter (ICR)
- 120dB True WDR, 3D DNR, Smart IR
- 4W
- 12V DC
- IP66 Rating


SPECIFICATIONS - Product Code: T8WB24-V036

PIC: TVI-65

| | |
|------------------------------|---|
| Model | T8WB24-V036 |
| Signal System | NTSC / PAL |
| Image Sensor | 1/3" Progressive Scan CMOS |
| Horizontal Resolution | 2.0MP |
| Effective Pixels | 1920(H) x 1080(V) |
| Sync System | Internal |
| Video Frame Rate | NTSC: 1080P @ 30fps ; PAL: 1080P @ 25fps |
| HD Video Output | 1 Analog HD Output |
| S/N Ratio | More than 52dB |
| Electronic Shutter | NTSC: 1/30~1/50,000 sec. ; PAL: 1/25~1/50,000 sec. |
| Minimum Illumination | 0.01 Lux @ F1.2 (AGC ON), 0 Lux with IR |
| Day & Night | Built-in Mechanical IR Cut Filter (ICR) |
| IR LED | 24pcs IR |
| IR Distance | 65ft / 20m |
| Lens Type | 3.6mm Fixed Lens (Angle of view: 80.9°) |
| Scene | Indoor, Outdoor, Indoor1, LOW-LIGHT |
| Camera ID | On / Off (15 characters, position programmable) |
| AGC | Support |
| D/N Mode | Color / BW / EXT |
| White Balance | ATW, AWC-SET, Indoor, Outdoor, Manual |
| Privacy Mask | On/Off, maximum 8 zones |
| Motion Detection | On/Off, maximum 4 zones |
| BLC | Support |
| Anti-flicker | On / Off |
| Language | English, Japanese, CHN1, CHN2, Korean, German, French, Italian, Spanish, Polish, Russian, Portuguese, Dutch, Turkish, Hebrew and Arabic |
| Functions | Eclipse, Digital noise reduction, Digital zoom(62x), Slow shutter, Mirror, Defog, Defect pixel correction, SMART D-ZOOM |
| Power Source | 12V DC |
| Power Consumption | 4W Max. |
| IP Rating | IP66 |
| Operating Temperature | -40°F ~ 140°F / -40°C ~ 60°C |
| Humidity | 90% or less (non-condensing) |
| Dimension | 6.1(L) x 2.5(W) x 2.8(H) inches / 155(L) x 70(W) x 63.4(H) mm |
| Net Weight | 0.8 lbs / 0.36 kg |

*Specifications and appearance are subject to change without notice.

DIAGRAM

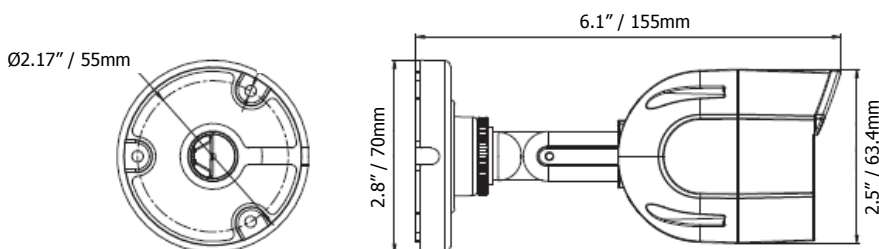

OPTIONAL ACCESSORIES



BK-113